

## HOCKERTON HOUSING PROJECT TRADING LTD

The Watershed, Gables Drive, Hockerton,


Southwell, Notts NG25 OQU

Tel: 01636 816902

Email: [hhp@hockerton.demon.co.uk](mailto:hhp@hockerton.demon.co.uk)

Website: [www.hockertonhousingproject.org.uk](http://www.hockertonhousingproject.org.uk)

Comparison of wind speed at the two wind turbine sites, Proven and ISKRA at Hockerton. The graph below shows a definite trend around 220-260 degrees. This proves that the large trees to the south west are affecting the performance of the Iskra machine.

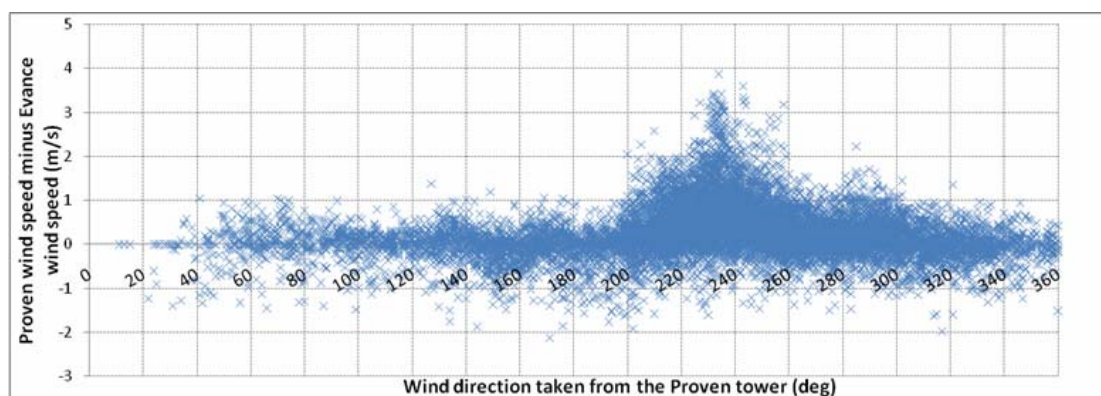

	Iskra AT5-1 wind speed (m/s)	Proven WT6000 wind speed (m/s)	Wind speed difference
August 09	1.37	1.57	14.6%
September 09	2.3	2.5	8.7%
October 09	2.07	2.12	2.4%
November 09 (up to 27 <sup>th</sup> )	3.44	3.73	8.4%
Last 4 weeks	3.64	3.94	8.2%

Using the Power predictor web site to predict output there would be around 40% more energy at the Proven tower than at the Iskra tower.